


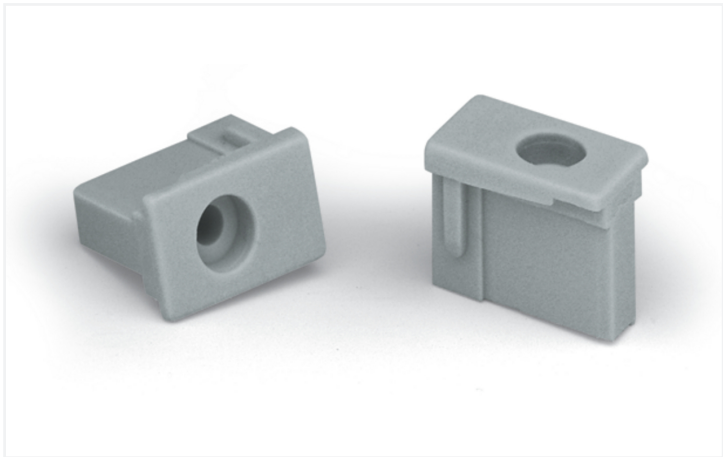

Color: ■ gray

Mechanical data	
Mounting type	Screw mount
Mounting type	Panel mounting
Suitable	for angled THT male headers

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.011 MJ
Weight	0.4 g

Commercial data	
Product Group	3 (Multi Conn. System)
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332117975
Customs tariff number	85389099990



Product Classification		
UNSPSC		39121702
eCl@ss 10.0		27-14-11-92
eCl@ss 9.0		27-14-11-92
ETIM 9.0		EC002848
ETIM 10.0		EC002848
ECCN		NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates					
General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	1466354	LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 231-193	

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 231-193 	ZUKEN Portal 231-193 

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories




Item No.: 231-195
Screw with nut; M2x12; for fixing element



Item No.: 231-194
Self-tapping screw; B 2.2x13, fixing hole 1.8 mm Ø

Installation Notes

Installation



Locking devices enhance connection reliability between male headers with angled solder pins and the PCB. This substantially reduces mechanical stress on both solder pins and joints, particularly when dealing with small lengths and frequent mating cycles.