




## Data Sheet | Item Number: 709-583


Switchgear cabinet outlet; for DIN-rail and screw mounting; for plug, type F, CEE 7/4 (Schuko); common in DE, NL, AT; with LED status indicator; with Push-in Cage Clamp double connection; red

<https://www.wago.com/709-583>

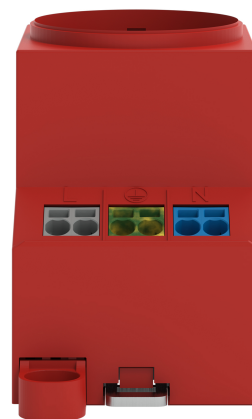


Color: ■ red

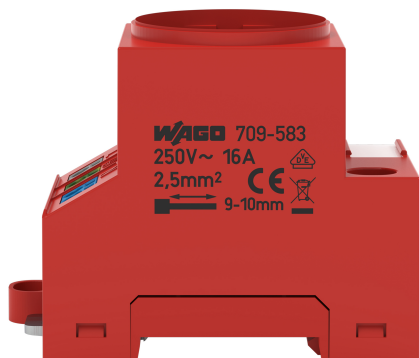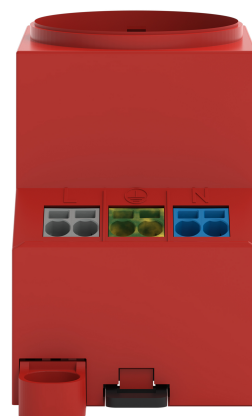



Similar to illustration

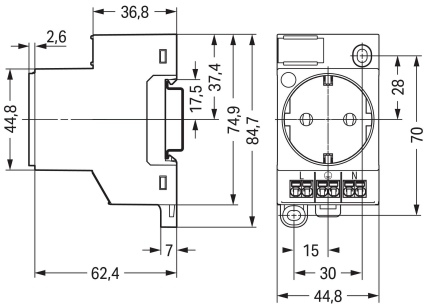

Dimensions in mm

| Notes                |                                                                                                                                                                                                                                                                       |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety Information   | Installation must be performed by a qualified electrician.                                                                                                                                                                                                            |
| Safety information 2 | During the insulation resistance test, the active conductors must be connected.<br>The integrated status indicator in the control cabinet outlet must be protected against transient overvoltages.<br>Overvoltage protection in low-voltage systems must be observed. |

| Technical data     |             |
|--------------------|-------------|
| Number of spacings | 3 -times    |
| Mounting type      | DIN-35 rail |

| Electrical data                  |                                              |
|----------------------------------|----------------------------------------------|
| Power loss P <sub>I</sub> (note) | LED status indication and contact resistance |
| Power loss P <sub>I</sub> (max.) | 1.8 W                                        |
| Rated current                    | 16 A                                         |

| Connection Data                                 |                                             |
|-------------------------------------------------|---------------------------------------------|
| Connection technology                           | Push-in CAGE CLAMP®                         |
| Strip length                                    | 9 ... 10 mm / 0.35 ... 0.39 inches          |
| Solid conductor                                 | 0.2 ... 2.5 mm <sup>2</sup> / 24 ... 14 AWG |
| Fine-stranded conductor                         | 0.2 ... 2.5 mm <sup>2</sup> / 24 ... 14 AWG |
| Fine-stranded conductor; with insulated ferrule | 2.5 mm <sup>2</sup> / 14 AWG                |
| Stranded conductor                              | 0.2 ... 2.5 mm <sup>2</sup> / 24 ... 14 AWG |

| Physical data                     |                        |
|-----------------------------------|------------------------|
| Width                             | 44.8 mm / 1.732 inches |
| Height                            | 84.7 mm / 3.48 inches  |
| Depth                             | 65 mm / 2.559 inches   |
| Depth from upper-edge of DIN-rail | 60 mm / 2.362 inches   |

| Mechanical data   |  |       |
|-------------------|--|-------|
| Potential marking |  | L ⊕ N |

| Material data                      |  |                                   |
|------------------------------------|--|-----------------------------------|
| Color                              |  | red                               |
| Material group                     |  | I                                 |
| Insulation material (main housing) |  | Polyamide (PA66)                  |
| Flammability class per UL94        |  | V0                                |
| Contact material                   |  | Copper alloy                      |
| Contact Plating                    |  | Sn                                |
| Clamping spring material           |  | Chrome-nickel spring steel (CrNi) |
| Weight                             |  | 81.6 g                            |

| Commercial data       |  |               |
|-----------------------|--|---------------|
| PU (SPU)              |  | 1 pcs         |
| Packaging type        |  | Box           |
| Country of origin     |  | BG            |
| GTIN                  |  | 4055143718301 |
| Customs tariff number |  | 85366990990   |

| Product Classification |  |                      |
|------------------------|--|----------------------|
| UNSPSC                 |  | 39121406             |
| eCl@ss 10.0            |  | 27-14-23-05          |
| eCl@ss 9.0             |  | 27-14-23-05          |
| ETIM 9.0               |  | EC001663             |
| ETIM 10.0              |  | EC001663             |
| ECCN                   |  | NO US CLASSIFICATION |

| Environmental Product Compliance |  |                         |
|----------------------------------|--|-------------------------|
| RoHS Compliance Status           |  | Compliant, No Exemption |

| Environmental requirements             |  |                |
|----------------------------------------|--|----------------|
| Processing temperature (min.)          |  | -35 °C         |
| Processing temperature                 |  | -35 °C         |
| Continuous operating temperature from  |  | -35 °C         |
| Continuous operating temperature up to |  | 85 °C          |
| Continuous operating temperature       |  | -35 ... +85 °C |

Approvals / Certificates

| General approvals                                                                  |                                       |          | Declarations of conformity and manufacturer's declarations |                              |          |
|------------------------------------------------------------------------------------|---------------------------------------|----------|------------------------------------------------------------|------------------------------|----------|
|  | Approval                              | Standard | Certificate Name                                           | Approval                     | Standard |
|                                                                                    | VDE                                   | -        | 40047680 (IEC 60884-1)                                     | EU-Declaration of Conformity | -        |
|                                                                                    | VDE Prüf- und Zertifizierungsinstitut |          |                                                            | WAGO GmbH & Co. KG           |          |
|                                                                                    |                                       |          |                                                            | UK-Declaration of Conformity | -        |
|                                                                                    |                                       |          |                                                            | WAGO GmbH & Co. KG           |          |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 709-583

↓

Documentation

| Bid Text |            |                  |   |
|----------|------------|------------------|---|
| 709-583  | 19.02.2019 | xml<br>4.13 KB   | ↓ |
| 709-583  | 26.11.2018 | docx<br>16.31 KB | ↓ |

CAD/CAE-Data

| CAD data                          | CAE data                               |
|-----------------------------------|----------------------------------------|
| 2D/3D Models 709-583 <div>↓</div> | EPLAN Data Portal 709-583 <div>↓</div> |
|                                   | ZUKEN Portal 709-583 <div>↓</div>      |

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marker

|                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <div><b>Item No.: 793-5501/000-006</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue</div>   |  <div><b>Item No.: 793-5501/000-007</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray</div> |  <div><b>Item No.: 793-5501/000-023</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green</div>  |  <div><b>Item No.: 793-5501/000-017</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green</div> |
|  <div><b>Item No.: 793-5501/000-012</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange</div> |  <div><b>Item No.: 793-5501/000-005</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red</div>  |  <div><b>Item No.: 793-5501/000-024</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet</div> |  <div><b>Item No.: 793-5501</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white</div>               |
|  <div><b>Item No.: 793-5501/000-002</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow</div> |  <div><b>Item No.: 793-501/000-006</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; blue</div>                                               |  <div><b>Item No.: 793-501/000-007</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; gray</div>                                                 |  <div><b>Item No.: 793-501/000-023</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; green</div>                                                     |
|  <div><b>Item No.: 793-501/000-017</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; light green</div>                                          |  <div><b>Item No.: 793-501/000-012</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; orange</div>                                             |  <div><b>Item No.: 793-501/000-005</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; red</div>                                                  |  <div><b>Item No.: 793-501/000-024</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; violet</div>                                                    |



1.1.1.1 Marker



**Item No.: 793-501**  
WMB marking card; as card; not stretchable; plain; snap-on type; white

**Item No.: 793-501/000-002**  
WMB marking card; as card; not stretchable; plain; snap-on type; yellow

**Item No.: 2009-115/000-006**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

**Item No.: 2009-115/000-007**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



**Item No.: 2009-115/000-023**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

**Item No.: 2009-115/000-017**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

**Item No.: 2009-115/000-012**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

**Item No.: 2009-115/000-024**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



**Item No.: 2009-115**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

**Item No.: 2009-115/000-002**  
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.1.1.2 Marking strip



**Item No.: 2009-110**  
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

Installation Notes

