
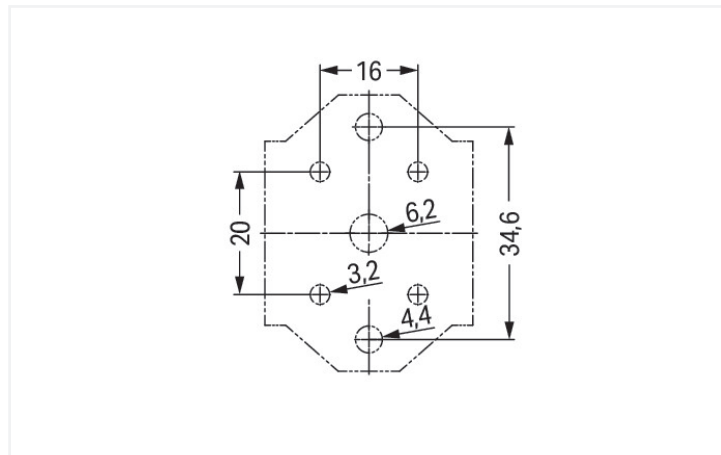


Data Sheet | Item Number: 770-673


Mounting plate; 3-pole; for distribution connectors; Plastic; white

<https://www.wago.com/770-673>

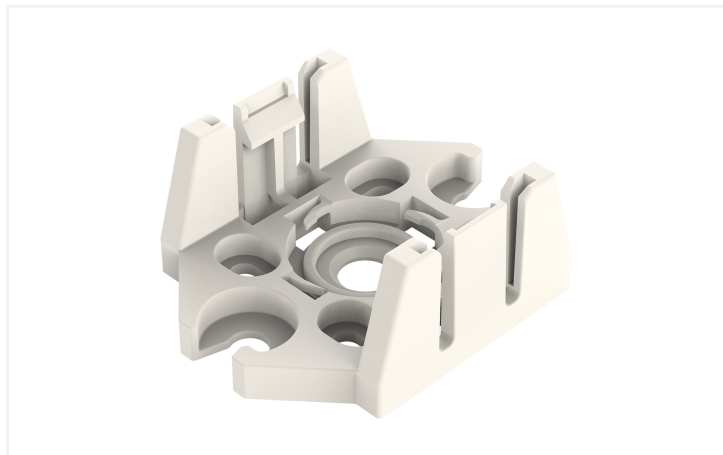

Color: ■ white

Dimensions in mm

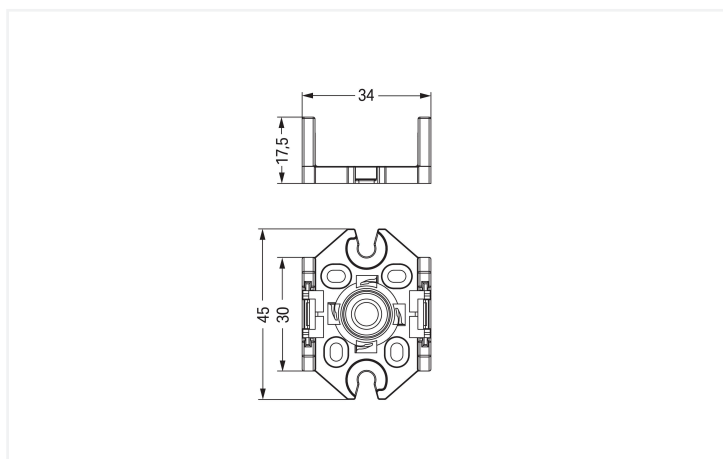

Dimensions in mm

Mounting accessories WINSTA® MIDI 3-pole

Choose tried-and-tested accuracy for the electrical installation at your construction site: The mounting accessories from the WINSTA® MIDI product line. With WAGO, you benefit from a large selection of expansions for the WINSTA® product line. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a variety of projects you can use for quick, easy and maximally flexible installation.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MIDI

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, even more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with protection against mismatching from WAGO.

- pre-assembled versions
- fast, secure installation



Notes	
General safety information	NOTICE: Observe installation and safety instructions! 1. Only to be used by a qualified electrician or by a person electrically instructed for the task (EIP per DIN VDE 0105-100). 2. Do not install while energized or under load. 3. Use only for its intended purpose. 4. Observe applicable national regulations, standards and directives. 5. Observe the technical specifications of the products. 6. Ensure correct polarity assignment. 7. Do not use damaged or contaminated components. 8. Observe conductor types, conductor cross-sections, strip lengths and cable diameters. 9. Insert conductors up to the stop. 10. Use only with locking lever and strain relief. 11. Use original accessories only. To be sold only with installation instructions!

Connection Data	
Connection 1	
Pole number	3

Mechanical data	
Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 3-pole

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.124 MJ
Weight	4.9 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332755542
Customs tariff number	39269097900



Product Classification		
UNSPSC		39121321
eCl@ss 10.0		27-44-06-92
eCl@ss 9.0		27-44-06-92
ETIM 9.0		EC002863
ETIM 10.0		EC002863
ECCN		NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-673

↓

Documentation				
Bid Text				
770-673	19.02.2019	xml	2.55 KB	↓
770-673	14.01.2015	doc	22.50 KB	↓
ausschreiben.de 770-673				↓

CAD/CAE-Data		
CAD data		CAE data
2D/3D Models 770-673		WSCAD Universe 770-673
		ZUKEN Portal 770-673



1 Compatible Products
1.1 Optional Accessories
1.1.1 Installation
1.1.1.1 Mounting accessories



Item No.: 890-601 Fixing pin; 5 mm Ø, for 1.5 ... 2.5 mm mounting plates; Plastic; black	Item No.: 770-601 Fixing pin; 6 mm Ø, for 2.5 ... 4.0 mm mounting plates; Plastic; black
--	--