



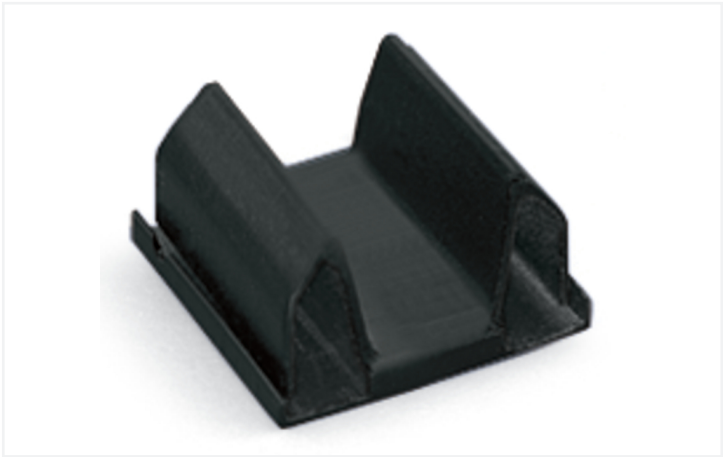

Szín: ■ fekete

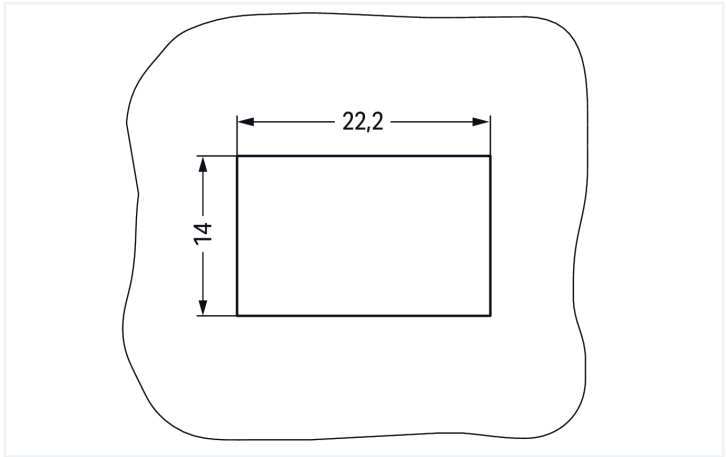

Méretetek mm-ben
Plate thickness: 0.5 ... 2 mm
Cutout tolerance: + 0.1 mm

Please note!

Cover WINSTA® MINI 3-pole

Realize the energy supply quickly and easily: The cover from the WINSTA® MINI product line is the solution for error-free electrical installation. An extensive range of accessories complements the WINSTA® product line from WAGO. Due to its particularly small dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very restricted spaces, i.e., for connections when very little room is available.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MINI

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- easy tool-free operation, a wide range of coding options
- fast, secure installation

Megjegyzések	
Megjegyzés	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Csatlakozástechnikai adatok	
Csatlakozás 1	
Pólusszám	3

Mechanikai adatok	
Rögzítés típusa	Bepattintható perem
Alkalmas	vágathoz

Anyag információk	
Megjegyzés az anyag információkhoz	
Information on material specifications can be found here	
Szín	fekete
Szigetelőanyag	Poliamid (PA66)
UL94 szerinti gyúlékonysági osztály	V0
Tűz terhelés	0.041 MJ
Súly:	1.4 g

Környezeti feltételek	
Feldolgozási hőmérséklet	-5 ... +40 °C
Folyamatos működési hőmérséklet	-35 ... +85 °C
Vegye figyelembe a folyamatos működési hőmérsékletet	Szigetelések alacsonyabb, mint ≤ 105 °C-os hőmérsékleti viszonyokhoz

Kereskedelmi adatok	
Product Group	20 (Winsta)
Nagy ECS (kis ECS)	100 db
Csomagolás típusa	Doboz
Származási ország	DE
GTIN (globális kereskedelmi áruazonosító szám)	4045454526498
Vámtarifaszám	39269097900

Product classification	
UNSPSC	39121721
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 8.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Letöltések

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-643

↓



Documentation				
Bid Text				
890-643	26.11.2014	doc	22.50 KB	↓
890-643	19.02.2019	xml	2.57 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 890-643	WSCAD Universe 890-643
↓	↓
	ZUKEN Portal 890-643
	↓